
Fracti Hello Kitty

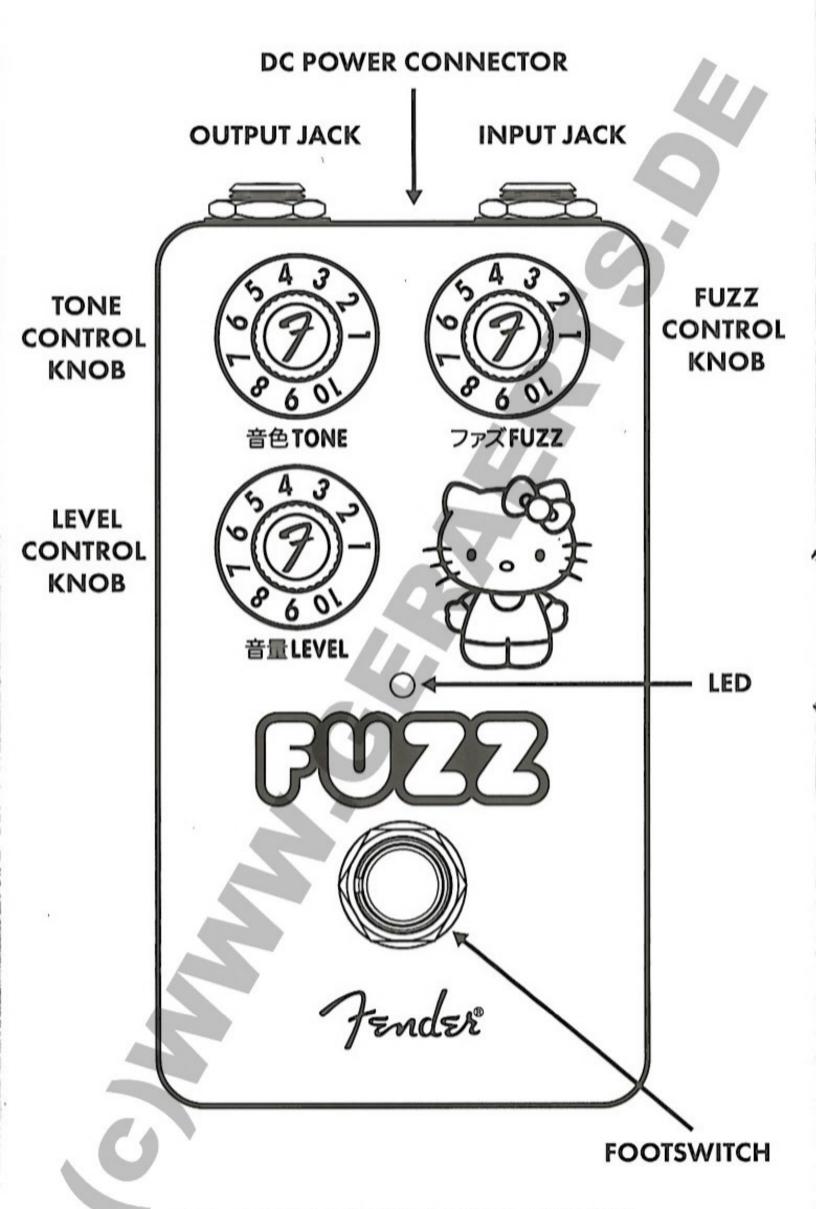

9V BATTERY SCREW ACCESS ON REAR

Frnder

HELLO KITTY® FUZZ

A fun-loving fuzz like no other—the Fender Hello Kitty® Fuzz introduces a pop of color and charm to one of the pedal world's most formative effects.

Sporting an opamp-based circuit with three simple controls, this pink-clad pedal kicks your guitar into woolly, splattering gain tones with unmistakable character. Use the fuzz, tone and level controls to cover a wide range of flavors from overdrive-like grit to full-on ripping fuzz.

OUTPUT JACK

Low-impedance output connects to amp or next pedal in signal chain.

INPUT JACK

High-impedance input for electric guitar, bass, acoustic guitars with pickup systems, keyboards and other instruments.

DC POWER CONNECTOR

Connect DC adapter here. Standard center-negative 9VDC jack for use with appropriate power supplies.

TONE CONTROL KNOB

Adjusts balance between treble and bass frequencies.

FUZZ CONTROL KNOB

Adjusts amount of fuzz.

LEVEL CONTROL KNOB

Adjusts output volume of effect.

LED

Illuminates when effect is on.

FOOTSWITCH

Turns effect on and off.


BATTERY COMPARTMENT (REAR)

Screw-access compartment houses one 9V battery.

INTERNAL TRIM POTENTIOMETER (ACCESSIBLE BY REMOVING COVER)

TONE 2 trim pot adjusts high-frequency character.

Remove cover using a flat-head screwdriver. Adjust trim pot using a Phillips-head screwdriver.

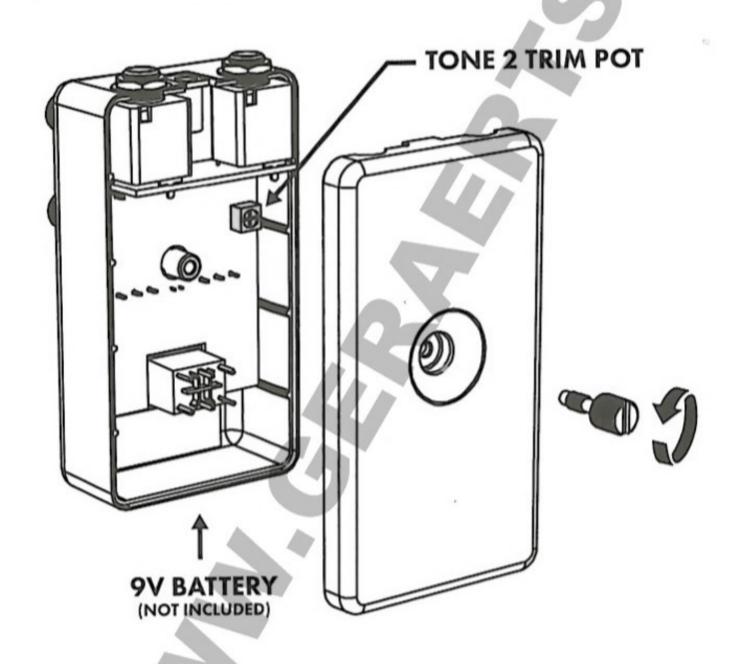



A PRODUCT OF FENDER MUSICAL INSTRUMENTS CORPORATION

311 CESSNA CIRCLE CORONA, CALIF. 92878 U.S.A.

Fender® is a registered trademark of FMIC.

Copyright © 2025 FMIC. All rights reserved.

PN 7730389000 REV. B

IMPORTANT SAFETY INSTRUCTIONS

- WARNING: To prevent damage, fire or shock hazard, do not expose the unit or its AC power to rain or moisture.
- · Do not alter the AC plug of the connected power adapter
- · Do not drip or splash liquids on the unit.
- · No user serviceable parts inside, refer servicing to qualified personnel only.
- WARNING: The unit must only be connected to a safety agency certified, regulated, power source (adapter), approved for use and compliant with applicable local and national regulatory safety requirements.
- Unplug the AC power adapter before cleaning the unit exterior. Use only a damp cloth for cleaning and then wait until the unit is completely dry before reconnecting it to power.
- Amplifiers and loudspeaker systems, and ear/headphones (if equipped) are capable
 of producing very high sound pressure levels which may cause temporary or permanent
 hearing damage. Use care when setting and adjusting volume levels during use.

ADDITIONAL LANGUAGES

Manual available in additional languages at www.fender.com/support

SPECIFICATIONS

IMPEDANCES
POWER SUPPLY

Input: $500k\Omega$ Output: $5k\Omega$ (max) 80mA min @ 9VDC regulated adapter +- \bigcirc -

 5.5×2.1 mm barrel connector (not included)

or 9V alkaline battery (not included)

POWER REQUIREMENTS

9VDC

DIMENSIONS

2.44" x 4.4" x 2.2" (62mm x 111.8mm x 55.9mm)

0.55 lbs (0.25kg)



Product specifications subject to change without notice

CE



© FENDER MUSICAL INSTRUMENTS 2025



© 2025 SANRIO CO., LTD.

M and ® denote U.S. Trademarks
Used Under License,
www.sanrio.com



SIL-34079

Fender Musical Instruments Corp. 311 Cessna Circle Corona, Calif. 92878 www.fender.com

产品中有害物质的名称及含量

部件名称	有害物质					
	位 (Pb)	承 (Hg)	傷 (Cd)	六价格 (Cr(VI))	多溴联苯 (PBB)	多溴二苯酚 (PBDE)
箱体	0	0	0	0	0	0
喇叭单元*	0	0	0	0	0	0
电子部分	x	0	х	0	0	0
接线端子	х	0	0	0	0	0
电线	х	0	0	0	0	0
附件	0	0	0	0	0	0

本表格依据 SJ/T 11364 的规定编制。

- O;表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。
- X:表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。
- 注: 含有有害物质的部件由于全球技术发展水平限制而无法实现有害物质的替代。

^{*}产品含有喇叭单元时有效。